



## Serratura elettrica automática con palanca de desbloqueo

### 3U3X10

#### PROPRIETA'

Resistencia de cierre	<b>357 Kg</b>
Fuerza dinámica de cierre	<b>449 Kg</b>
Durabilidad garantizada	<b>200000 ciclos</b>
Pestillo	<b>Ajustable de zamak</b>
Profundidad de pestillo	<b>6.15 mm</b>
Ajuste de pestillo de mínimo a máximo	<b>7.1 ~ 10.1 mm</b>
Tapa	<b>Nylon</b>

#### INFORMAZIONI GENERALI

Tipo	<b>Serratura elettrica</b>
Modalità di apertura	<b>Normalmente aperto (NO)</b>
Meccanismo	<b>Automatico con leva di sblocco</b>

#### AMBIENTE


Temperatura di esercizio	<b>-25 °C ~ 70 °C</b>
--------------------------	-----------------------

#### ALIMENTAZIONE CONSUMO

modo dell'alimentazione elettrica	<b>DC / AC</b>
Tensione	<b>10V ~ 24V</b>
Amperaggio	<b>550mA</b>

#### MATERIALE E DIMENSIONI

Dimensioni	<b>70 x 29 x 21 mm</b>
Peso netto	<b>180 g</b>

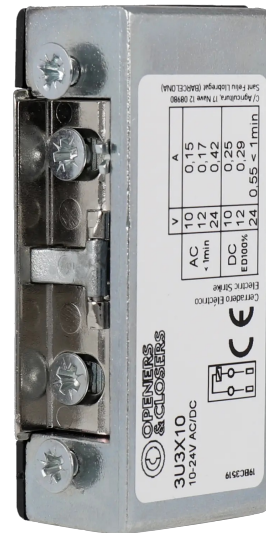

**OPENERS & CLOSERS**  
**3U3X10**  
**10-24V AC/DC**  
 180g  
 70x29x21mm  
 CE  
 Certificado Electrico  
 Electric Strike  
 V A  
 12 0.45  
 12 0.17  
 24 0.42  
 24 0.25  
 DC 10 0.25  
 DC 12 0.25  
 DC 24 0.55 ± 1mm